

SENSYLINK Microelectronics

(CHT8305)

Digital Humidity & Temperature Sensor

CHT8305 is a Digital Humidity and Temperature Sensor with $\pm 3.0\%RH$ Accuracy for humidity and $\pm 0.5^{\circ}C$ Accuracy for temperature. It is compatible with I^2C and 2-wire Interface. It is ideally used in HVAC, environment monitor etc.

Description

CHT8305 is a digital humidity and temperature sensor with $\pm 3.0\%RH$ (Max.) accuracy for humidity and $\pm 0.5^{\circ}C$ (Max.) accuracy for temperature. Humidity and Temperature data can be read out directly via I²C digital interface by MCU, Bluetooth Chip or SoC chip.

CHT8305 supports I²C communication with speed up to 400 kHz.

Each chip is specially calibrated for in factory before shipment to customers. There is no need for re-calibration anymore.

It includes a high precision band-gap circuit, a 14-bit analog to digital converter, a calibration unit with non-volatile memory, and a digital interface block.

It has ALERT logic output pin with open drain structure, which is active low.

The chip supports up to 4 devices in one I²C bus by setting different slave address via AD0 pin.

Available Package: DFN-3x3-6 package


Features

- Operation Voltage: 2.5V to 5.5V
- Average Operating Current: 1.5uA (Typ.), 3.0uA (Max.)
- Standby Current: 0.15uA (Typ.), 0.3uA (Max.)
- Temperature Accuracy without calibration: Maximum: $\pm 0.5^{\circ}C$ from $0^{\circ}C$ to $50^{\circ}C$
- Humidity Accuracy without calibration: Maximum: $\pm 3.0\%RH$ at 50%RH
- 14 bit ADC for Temperature and Humidity
- Compatible with 2-wire and I²C interface
- Programmable Alert response of Over Temperature and/or Humidity
- Generate 4 different slave address by setting AD0 pin
- Temperature Range: $-40^{\circ}C$ to $125^{\circ}C$
- Humidity Range: 0%RH to 100%RH
- Protection Cover is available

Applications

- Smart HVAC System
- Environment Monitor
- Portable/Wearable Weather Monitor

PIN Configurations (Top View)

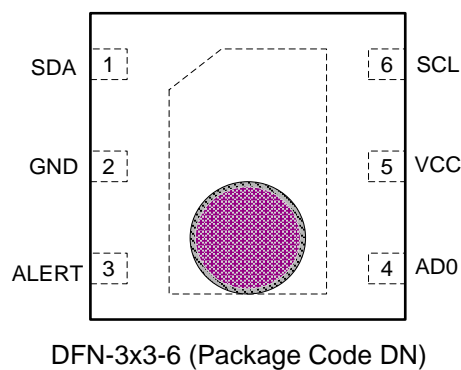

Typical Application

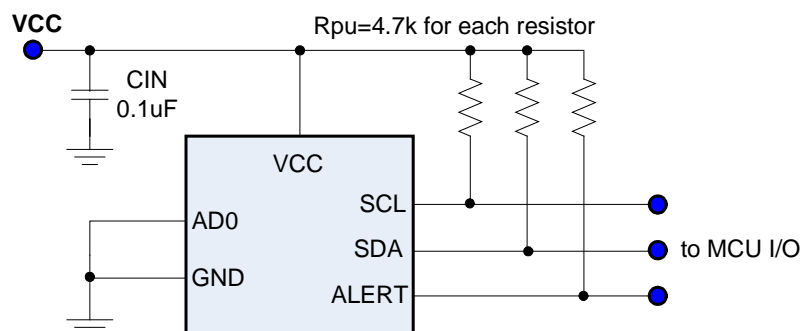


Figure 1. Typical Application of CHT8305

Pin Description

PIN No.	PIN Name	Description
1	SDA	Digital interface data input or output pin, need a pull-up resistor to VCC.
2	GND	Ground pin.
3	ALERT	To Indicate alert status of over Humidity and/or Temperature limitation programmed by setting H _{LIMIT} /T _{LIMIT} register. Need a pull-up resistor to VCC in application. active low with open drain output.
4	AD0	Slave Address selection pins, the chip can be defined total 4 different slave addresses by connecting this pin to GND, VCC, SCL or SDA pin respectively. If leave this pin open, address is 0x80. See Slave Address for detail.
5	VCC	Power supply input pin, using 0.1uF low ESR ceramic capacitor to ground
6	SCL	Digital interface clock input pin, need a pull-up resistor to VCC.

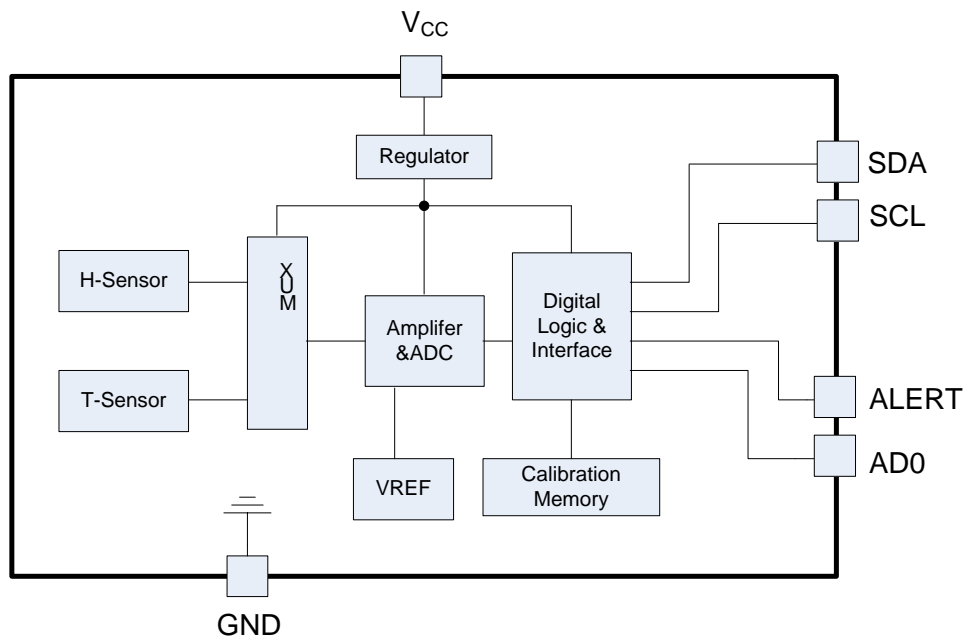
Function Block


Figure 2. CHT8305 function block

Ordering Information

CHT8305 X X - X

Package Type
DN : DFN3x3-6

Packing
R: Tape & Reel

Protection
C : with Cover
Blank : without Cover

Order PN	Accuracy	Green ¹	Package	Marking ID ²	Packing	MPQ	Operation Temperature	Protection Cover
CHT8305DNR	±0.5°C ±3%RH	Halogen free	DFN-3x3-6	8305 YWWAXX	Tape & Reel	3,000	-40°C~+125°C	No
CHT8305DNR-C	±0.5°C ±3%RH	Halogen free	DFN-3x3-6	8305 YWWAXX	Tape & Reel	3,000	-40°C~+125°C	Yes

Notes

1. Based on ROHS Y2012 spec, Halogen free covers lead free. So most package types Sensylink offers only states halogen free, instead of lead free.

2. Marking ID includes 2 rows of characters. In general, the 1st row of characters are part number, and the 2nd row of characters are date code plus production information.

- 1) Generally, date code is represented by 3 numbers. The number stands for year and work week information. e.g. 501 stands for the first work week of year 2015; 621 stands for the 21st work week of year 2016.
- 2) Right after the date code information, the next 2-3 numbers or letters are specified to stand for supplier or production location information.

Absolute Maximum Ratings (Note3)


Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC} to GND	-0.3 to 5.5	V
SDA, SCL, AD0 Voltage	$V_{SDA}/V_{SCL}/V_{AD0}$ to GND	-0.3 to 5.5	V
ALERT Voltage	V_{ALERT} to GND	-0.3 to 5.5	V
Operation junction temperature	T_J	-50 to 150	°C
Storage temperature Range	T_{STG}	-65 to 150	°C
Lead Temperature (Soldering, 10 Seconds)	T_{LEAD}	260	°C
ESD MM	ESD_{MM}	600	V
ESD HBM	ESD_{HBM}	6000	V
ESD CDM	ESD_{CDM}	1000	V

Note3

1. *Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at the "Absolute Maximum Ratings" conditions or any other conditions beyond those indicated under "Recommended Operating Conditions" is not recommended. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.*
2. *Using 2oz dual layer (Top, Bottom) FR4 PCB with 2.5x1.4 mm² cooper as thermal PAD*

Recommended Operating Conditions

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	2.5 ~ 5.0	V
Ambient Operation Temperature Range	T_{AT}	-40 ~ +125	°C
Ambient Operation Temperature Range for Humidity	T_{ATH}	0 ~ +85	°C
Ambient Operation Humidity Range	T_{AH}	0 ~ 100	%RH

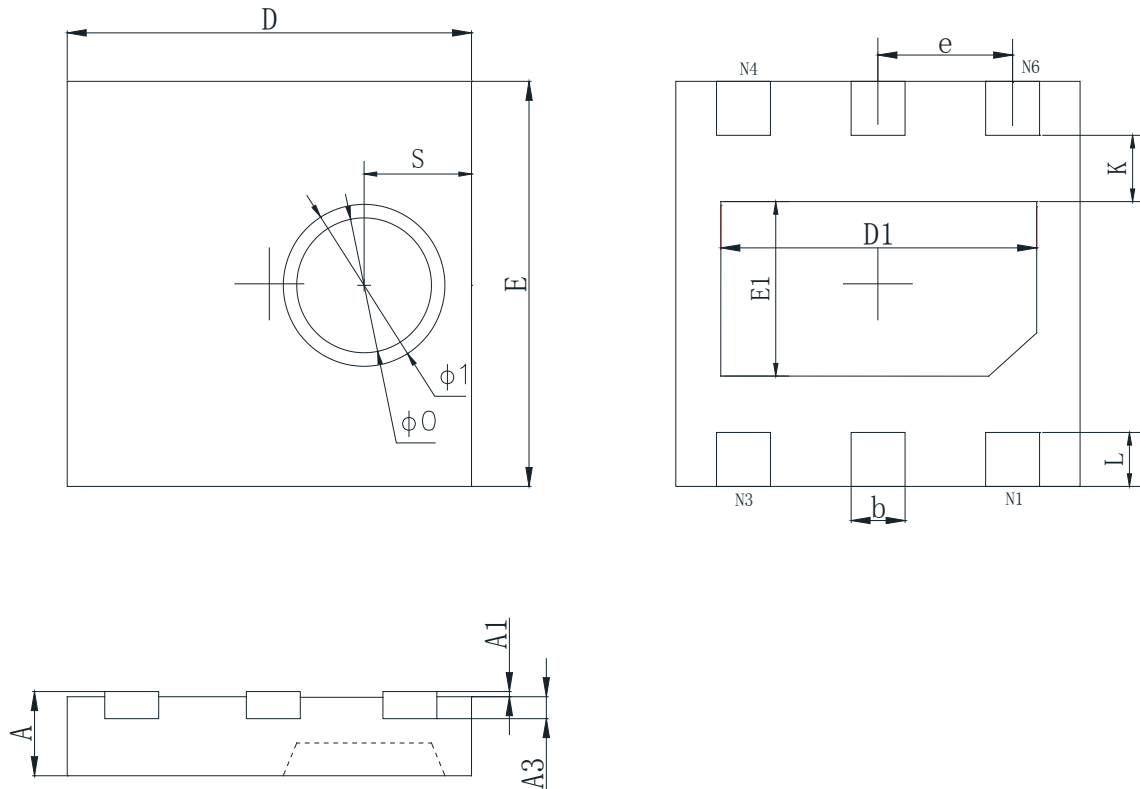Package Outline Dimensions
DFN-3x3-6 Unit (mm)


Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.100	0.035	0.043
A1	0.010	0.050	0.000	0.002
A3	0.203REF.		0.008REF	
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
D1	2.300	2.500	0.091	0.098
E1	1.400	1.600	0.055	0.063
k	0.350MIN.		0.014REF	
b	0.350	0.450	0.014	0.018
e	1.000YP.		0.040TYP	
L	0.350	0.450	0.014	0.018
S	0.740	0.840	0.029	0.033
φ0	1.000TYP		0.040TYP	
φ1	1.200TYP		0.048TYP	



SENSYLINK Microelectronics Co., Ltd

www.sensylink.com

IMPORTANT NOTICE

SENSYLINK Microelectronics Co., Ltd reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein or to discontinue any product or service. Customers should obtain the latest relevant information before placing orders and should verify the latest and complete information. SENSYLINK Microelectronics does not assume any responsibility for use of any product, nor does SENSYLINK Microelectronics any liability arising out of the application or use of this document or any product or circuit described herein. SENSYLINK Microelectronics assumes no liability for applications assistance or the design of Customers' products. Customers are responsible for their products and applications using SENSYLINK Microelectronics components. SENSYLINK Microelectronics does not convey any license under its patent or trademark rights nor the other rights.

SENSYLINK Microelectronics Co., Ltd ©2019.